



Feasibility charts 2016

English

Effective from 25.03.2016


Index

P system – manual knob control	
SL20P SL22P SL24P Venetian	p. 04
B system – manual bottom control	
SL20B SL22B SL27B Venetian	p. 05
S system – manual control by sliding magnet	
SL20S Venetian	p. 06
SL20S SL22S Pleated	p. 07
C system – cord or external motor control	
SL20C SL22C SL27C SL29C SL32C Venetian	p. 08
SL20C SL22C SL27C SL29C SL32C Pleated	p. 09
SL27C SL29C SL32C Pleated Black-out	p. 10
SL27C Roller	p. 11
W system – battery-operated motorised control	
SL20W SL22W SL27W SL29W SL32W Swipe Venetian	p. 12
SL20W SL22W SL27W SL29W SL32W Swipe Pleated	p. 13
SL27W SL29W SL32W Swipe Pleated Black-out	p. 14
M system – internal brushless motor control	
SL20MB SL22MB SL27MB SL29MB SL32MB Venetian	p. 15
SL20MB SL22MB SL27MB SL29MB SL32MB Pleated	p. 16
SL27MB SL29MB SL32MB Pleated Black-out	p. 17

P system – manual knob control

SL20P SL22P SL24P Venetian

SL20P SL22P Venetian

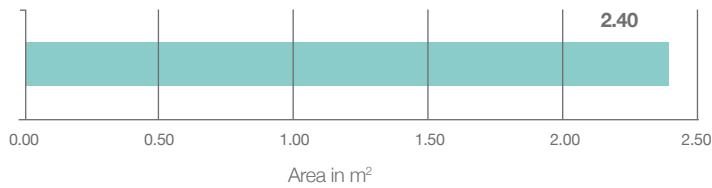


Possible dimensions:

Tilt-only blind

W min =	190 mm	W max =	2000 mm
H min =	300 mm	H max =	2500 mm

SL24P Venetian

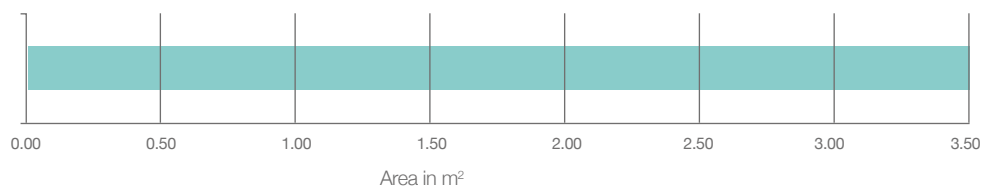

Possible dimensions:


Tilt-only blind

W min =	190 mm	W max =	3000 mm
H min =	300 mm	H max =	3000 mm

B system – manual bottom control

SL20B SL22B SL27B Venetian

SL20B SL22B Venetian

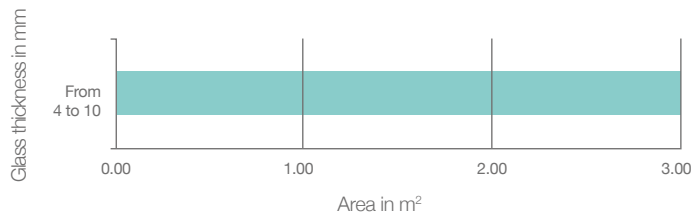

Possible dimensions:

Tilt-only blind


W min =	250 mm	W max =	2000 mm
H min =	300 mm	H max =	2500 mm

Feasibility notes

Maximum height possible according to width

with W from	250	to	300 mm	H max =	1300 mm
with W from	301	to	350 mm	H max =	1800 mm
with W from	351	to	2000 mm	H max =	2500 mm

SL27B Venetian

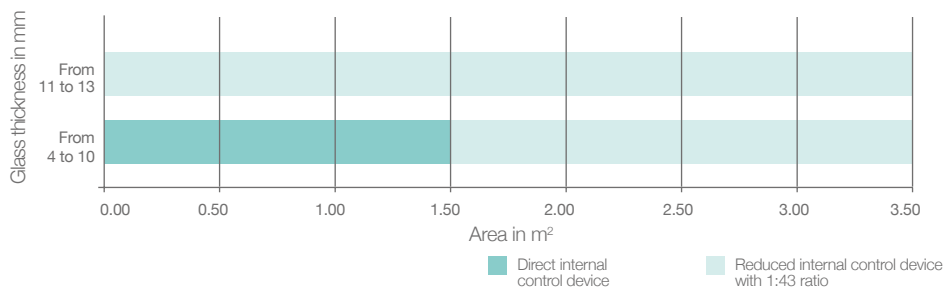

Possible dimensions:

Tilt-only blind

W min =	300 mm	W max =	2500 mm
H min =	300 mm	H max =	2500 mm

Feasibility notes


Maximum height possible according to width

with W from	300	to	349 mm	H max =	2000 mm
with W from	350	to	2500 mm	H max =	2500 mm

S system – Manual control by sliding magnet

SL20S Venetian

SL20S Venetian

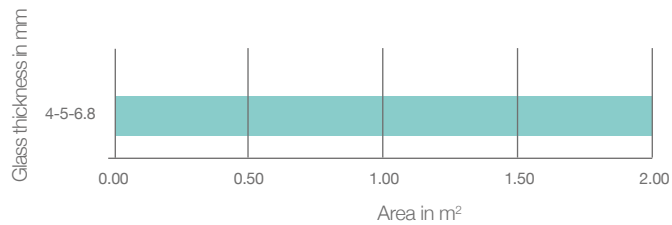

Possible dimensions:

W min =	300 mm	W max =	1500 mm
H min =	600[^] mm	H max =	2200 mm

[^] 300 mm with tilt-only blind (SL20SA)

Feasibility notes

Maximum height possible according to width

with W from	300	to	350 mm	H max =	1400 mm*
with W from	351	to	550 mm	H max =	1800 mm*
with W from	551	to	1500 mm	H max =	2200 mm**


* Up to H = 2200 mm, blind supplied with tilt-only function and locked bottom rail (SL20SA)

** For areas from 2.01 m² to 3.3 m², blind supplied with tilt-only function and completely raised

S system – Manual control by sliding magnet

SL20S SL22S Pleated

SL20S SL22S Pleated

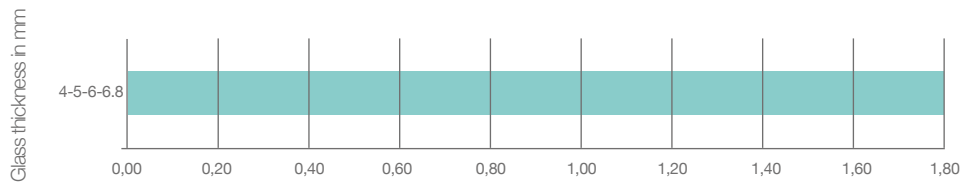

Possible dimensions:


W min =	200 mm	W max =	1200 mm
H min =	200 mm	H max =	2000 mm

N.B.: Feasibility charts with triple glazing may vary from the ones indicated here below: please refer to your ScreenLine sales contact for more details.

C system – cord or external motor control

SL20C SL22C SL27C SL29C SL32C Venetian

SL20C SL22C Venetian

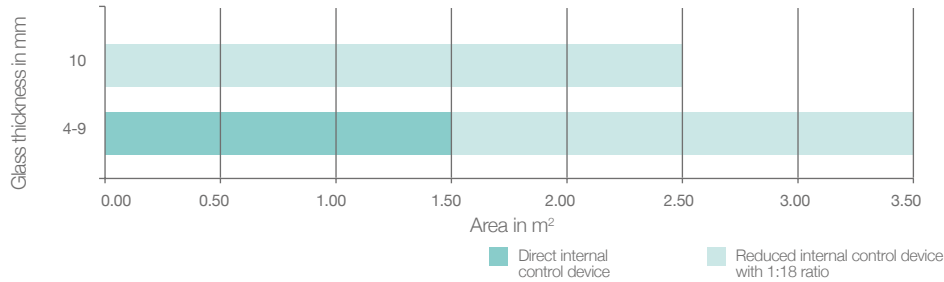

Possible dimensions:

W min =	300 mm	W max =	2000 mm
H min =	300 mm	H max =	2600 mm

Feasibility notes


Maximum height possible according to width

Blind with raising and tilting functions

with W from	300	to	350 mm	H max =	1100 mm*
with W from	351	to	400 mm	H max =	1800 mm*
with W from	401	to	450 mm	H max =	2150 mm*
with W from	451	to	2000 mm	H max =	2600 mm**

* Up to H = 2600 mm, blind supplied with tilt-only function and locked bottom rail
 ** For areas from 3.51 m² to 5.2 m², blind supplied with tilt-only function and completely raised (with 10-mm glass from 2.51 to 5.2 m²)

SL27C SL29C SL32C Venetian

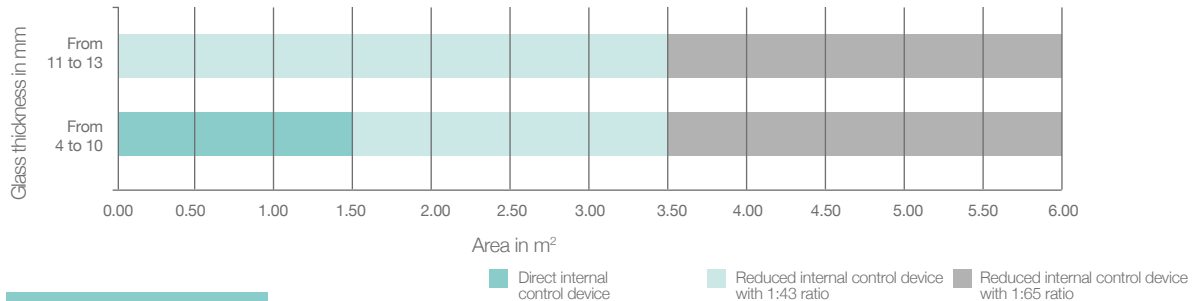

SL27C Venetian

Possible dimensions:

W min =	300 mm	W max =	3000 mm
H min =	300 mm	H max =	3000 mm

Feasibility notes

Maximum height possible according to width

Blind with raising and tilting functions

with W from	300	to	350 mm	H max =	750 mm*
with W from	351	to	480 mm	H max =	1800 mm*
with W from	481	to	580 mm	H max =	2400 mm*
with W from	581	to	3000 mm	H max =	3000 mm**

SL29C Venetian

Possible dimensions:

W min =	340 mm	W max =	3000 mm
H min =	300 mm	H max =	3000 mm

Feasibility notes

Maximum height possible according to width

Blind with raising and tilting functions

with W from	340	to	400 mm	H max =	770 mm*
with W from	401	to	480 mm	H max =	1800 mm*
with W from	481	to	580 mm	H max =	2890 mm*
with W from	581	to	3000 mm	H max =	3000 mm**

SL32C Venetian

Possible dimensions:

W min =	300 mm	W max =	3000 mm
H min =	300 mm	H max =	3000 mm

Feasibility notes

Maximum height possible according to width

Blind with raising and tilting functions

with W from	300	to	350 mm	H max =	550 mm*
with W from	351	to	480 mm	H max =	1600 mm*
with W from	481	to	580 mm	H max =	2200 mm*
with W from	581	to	3000 mm	H max =	3000 mm**

* Up to H = 3000 mm, blind supplied with tilt-only function and locked bottom rail (SL27/29/32A)


** For areas from 6.01 m² to 9 m², blind supplied with tilt-only function and completely raised.

N.B.: Feasibility charts with triple glazing may vary from the ones indicated here below: please refer to your ScreenLine sales contact for more details.

C system – cord or external motor control

SL20C SL22C SL27C SL29C SL32C Pleated

SL20C SL22C Pleated

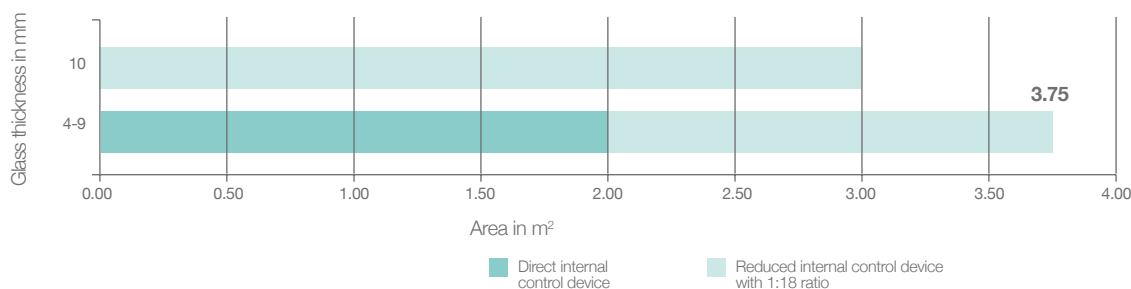

Possible dimensions:


W min =	300 mm	W max =	1500 mm
H min =	300 mm	H max =	2500 mm

Feasibility notes

Maximum height possible according to width

with W from	300	to	350 mm	H max =	1100 mm
with W from	351	to	400 mm	H max =	1800 mm
with W from	401	to	450 mm	H max =	2150 mm
with W from	451	to	1500 mm	H max =	2500 mm

SL27C SL29C SL32C Pleated

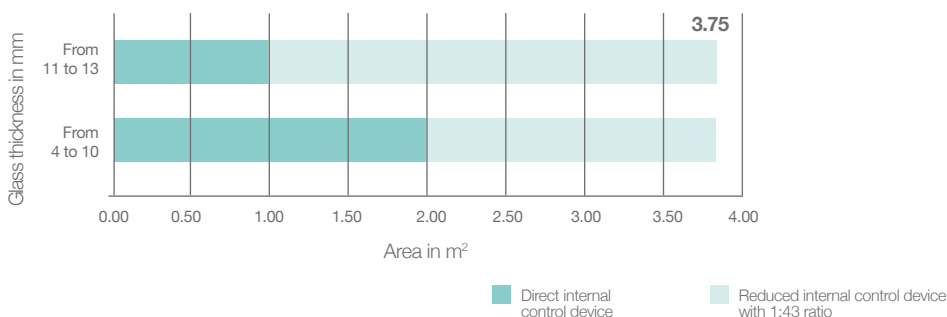

SL27C Pleated

Possible dimensions:

W min =	300 mm	W max =	1500 mm
H min =	300 mm	H max =	2500 mm

Feasibility notes

Maximum height possible according to width

with W from	300	to	350 mm	H max =	750 mm
with W from	351	to	480 mm	H max =	1800 mm
with W from	481	to	550 mm	H max =	2400 mm
with W from	551	to	1500 mm	H max =	2500 mm

SL29C Pleated

Possible dimensions:

W min =	340 mm	W max =	1500 mm
H min =	300 mm	H max =	2500 mm

Feasibility notes

Maximum height possible according to width

with W from	340	to	400 mm	H max =	800 mm
with W from	401	to	480 mm	H max =	1800 mm
with W from	481	to	550 mm	H max =	2400 mm
with W from	551	to	1500 mm	H max =	2500 mm

SL32C Pleated

Possible dimensions:

W min =	300 mm	W max =	1500 mm
H min =	300 mm	H max =	2500 mm

Feasibility notes

Maximum height possible according to width


with W from	300	to	350 mm	H max =	550 mm
with W from	351	to	480 mm	H max =	1600 mm
with W from	481	to	550 mm	H max =	2200 mm
with W from	551	to	1500 mm	H max =	2500 mm

N.B.: Feasibility charts with triple glazing may vary from the ones indicated here below: please refer to your ScreenLine sales contact for more details.

C system – cord or external motor control

SL27C SL29C SL32C Pleated Black-out

SL27C SL29C SL32C Pleated Black-out

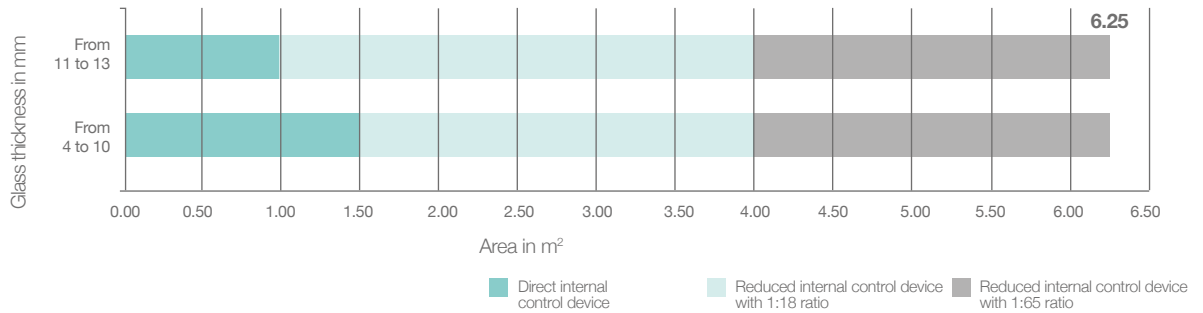

SL27C Pleated Black-out

Possible dimensions:

W min =	300 mm	W max =	2500 mm
H min =	300 mm	H max =	2500 mm

Feasibility notes

Maximum height possible according to width

with W from	300	to	350 mm	H max =	750 mm
with W from	351	to	480 mm	H max =	1800 mm
with W from	481	to	550 mm	H max =	2400 mm
with W from	551	to	2500 mm	H max =	2500 mm

SL29C Pleated Black-out

Possible dimensions:

W min =	340 mm	W max =	2500 mm
H min =	300 mm	H max =	2500 mm

Feasibility notes

Maximum height possible according to width

with W from	340	to	400 mm	H max =	770 mm
with W from	401	to	480 mm	H max =	1800 mm
with W from	481	to	580 mm	H max =	2300 mm
with W from	581	to	2500 mm	H max =	2500 mm

SL32C Pleated Black-out

Possible dimensions:

W min =	300 mm	W max =	2500 mm
H min =	300 mm	H max =	2500 mm

Feasibility notes

Maximum height possible according to width


with W from	300	to	350 mm	H max =	550 mm
with W from	351	to	480 mm	H max =	1600 mm
with W from	481	to	550 mm	H max =	2200 mm
with W from	551	to	2500 mm	H max =	2500 mm

N.B.: Feasibility charts with triple glazing may vary from the ones indicated here below: please refer to your ScreenLine sales contact for more details.

C system – cord or external motor control

SL27C Roller

SL27C Roller

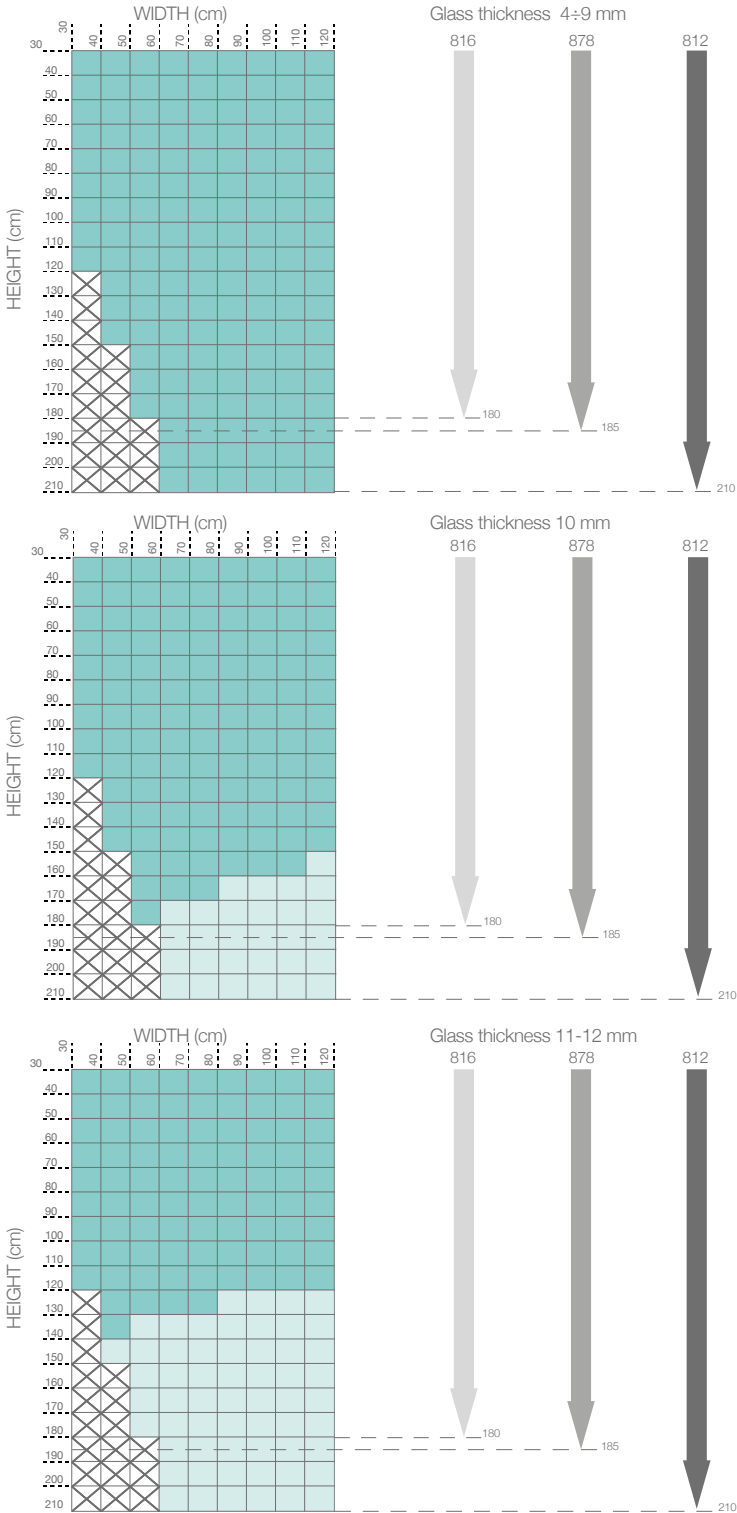


- Verosol® fabrics
- 816 Transparent
 - 812 Semi-transparent
 - 878 Opaque
 - Direct internal control device
 - Reduced internal control device
 - Not feasible

W system – battery-operated motorised control

SL20W SL22W SL27W SL29W SL32W Swipe Venetian

SL20W SL22W Swipe Venetian

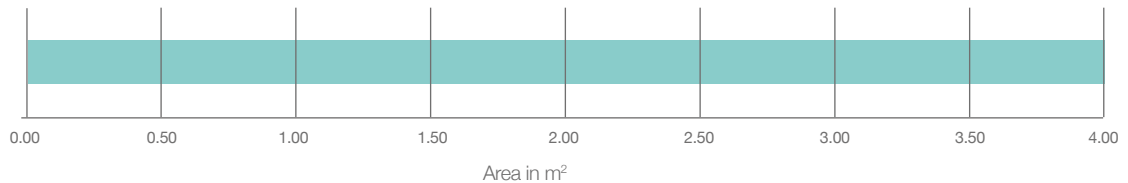

Possible dimensions:

W min =	300 mm	W max =	2000 mm
H min =	300 mm	H max =	2600 mm

Feasibility notes

Maximum height possible according to width


Blind with raising and tilting functions

with W from	300	to	350 mm	H max =	1670 mm*
with W from	351	to	400 mm	H max =	2020 mm*
with W from	401	to	2000 mm	H max =	2600 mm**

* Up to H = 2600 mm, blind supplied with tilt-only function and locked bottom rail

** For areas from 4.01 m² to 5.2 m², blind supplied with tilt-only function and completely raised.

SL27W SL29W SL32W Swipe Venetian

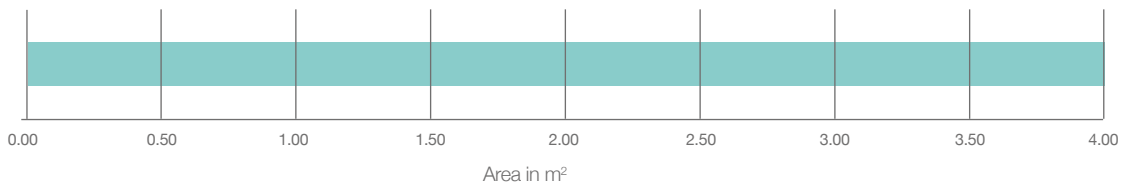

SL27W SL32W Swipe Venetian

Possible dimensions:

W min =	320 mm	W max =	3000 mm
H min =	300 mm	H max =	3000 mm

Feasibility notes

Maximum height possible according to width

Tilt-only blind

with W from	320	to	389 mm	H max =	3000 mm
-------------	-----	----	--------	---------	---------

Blind with raising and tilting functions

with W from	390	to	419 mm	H max =	1000 mm*
with W from	420	to	449 mm	H max =	1600 mm*
with W from	450	to	599 mm	H max =	2100 mm*
with W from	600	to	3000 mm	H max =	3000 mm**

* Up to H = 3000 mm, blind supplied with tilt-only function and locked bottom rail

** For areas from 4.01 m² to 9 m², blind supplied with tilt-only function and completely raised.

SL29W Swipe Venetian

Possible dimensions:

W min =	340 mm	W max =	3000 mm
H min =	300 mm	H max =	3000 mm

Feasibility notes

Maximum height possible according to width

Tilt-only blind

with W from	340	to	399 mm	H max =	3000 mm
-------------	-----	----	--------	---------	---------

Blind with raising and tilting functions

with W from	400	to	430 mm	H max =	1090 mm*
with W from	431	to	460 mm	H max =	1620 mm*
with W from	461	to	490 mm	H max =	2150 mm*
with W from	491	to	520 mm	H max =	2680 mm*
with W from	521	to	3000 mm	H max =	3000 mm**


* Up to H = 3000 mm, blind supplied with tilt-only function and locked bottom rail

** For areas from 4.01 m² to 9 m², blind supplied with tilt-only function and completely raised.

W system – battery-operated motorised control

SL20W SL22W SL27W SL29W SL32W Swipe Pleated

SL20W SL22W Swipe Pleated

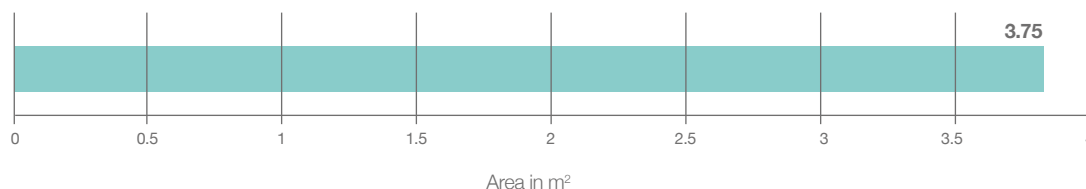

Possible dimensions


W min =	300 mm	W max =	1500 mm
H min =	300 mm	H max =	2500 mm

Feasibility notes

Maximum height possible according to width

with W from	300	to	350 mm	H max =	1670 mm
with W from	351	to	400 mm	H max =	2020 mm
with W from	401	to	1500 mm	H max =	2500 mm

SL27W SL29W SL32W Swipe Pleated

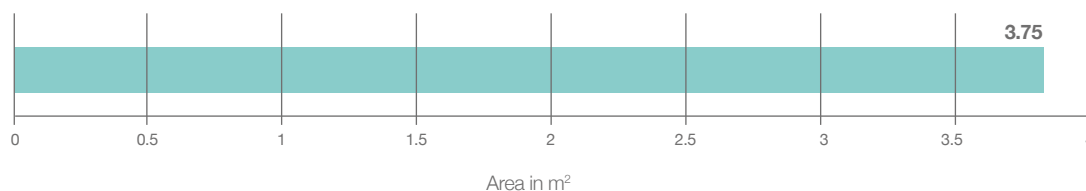

Possible dimensions:

W min =	390 mm	W max =	1500 mm
H min =	300 mm	H max =	2500 mm

Feasibility notes


Maximum height possible according to width

with W from	390	to	420 mm	H max =	1100 mm
with W from	421	to	550 mm	H max =	1800 mm
with W from	551	to	1500 mm	H max =	2500 mm

W system – battery-operated motorised control

SL27W SL29W SL32W Swipe Pleated Black-out

SL27W SL29W SL32W Swipe Pleated Black-out

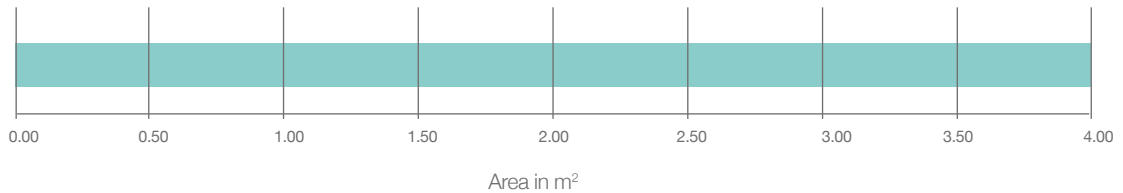

SL27-32W Swipe Pleated Black-out

Possible dimensions:

W min =	390 mm	W max =	2500 mm
H min =	300 mm	H max =	2500 mm

Feasibility notes

Maximum height possible according to width

with W from	390	to	419 mm	H max =	1000 mm
with W from	420	to	449 mm	H max =	1600 mm
with W from	450	to	479 mm	H max =	2100 mm
with W from	480	to	2500 mm	H max =	2500 mm

SL29W Swipe Pleated Black-out

Possible dimensions:

W min =	400 mm	W max =	2500 mm
H min =	300 mm	H max =	2500 mm

Feasibility notes


Maximum height possible according to width

with W from	400	to	430 mm	H max =	1270 mm
with W from	431	to	460 mm	H max =	1800 mm
with W from	461	to	490 mm	H max =	2300 mm
with W from	491	to	2500 mm	H max =	2500 mm

M system – internal brushless motor control

SL20MB SL22MB SL27MB SL29MB SL32MB Venetian

SL20MB SL22MB Venetian

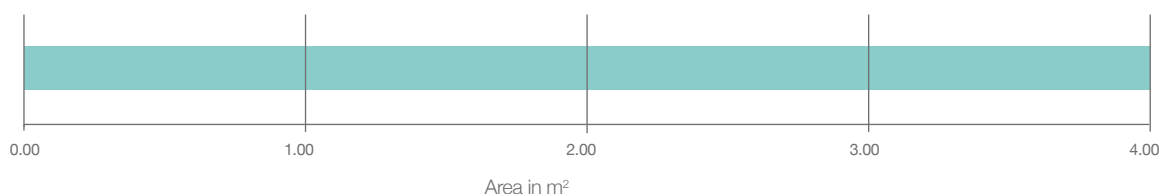

Possible dimensions:

W min =	300 mm	W max =	2000 mm
H min =	300 mm	H max =	2600 mm

Feasibility notes

Maximum height possible according to width

with W from 300 to 350 mm H max = 1670 mm*


with W from 351 to 400 mm H max = 2020 mm*

with W from 401 to 2000 mm H max = 2600 mm**

* Up to H = 2600 mm, blind supplied with tilt-only function and locked bottom rail

** For areas from 4.01 m² to 5.2 m², blind supplied with tilt-only function and completely raised.

SL27MB SL29MB SL32MB Venetian

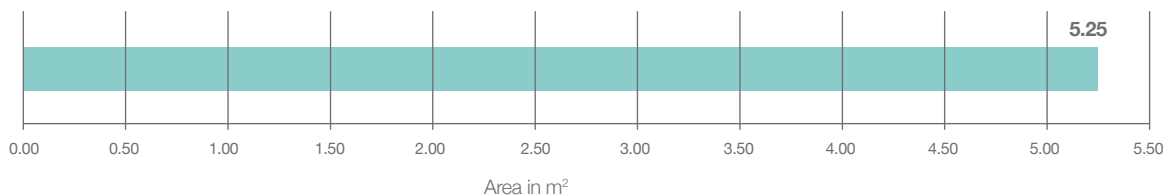

SL27MB SL32MB Venetian

Possible dimensions:

W min =	320 mm	W max =	3000 mm
H min =	300 mm	H max =	3000 mm

Feasibility notes

Maximum height possible according to width

Tilt-only blind

con W da 320 to 389 mm H max = 3000 mm

Blind with raising and tilting functions

with W from 390 to 419 mm H max = 1000 mm*

with W from 420 to 449 mm H max = 1600 mm*

with W from 450 to 599 mm H max = 2100 mm*

with W from 600 to 3000 mm H max = 3000 mm**

SL29MB Venetian

Possible dimensions:

W min =	340 mm	W max =	3000 mm
H min =	300 mm	H max =	3000 mm

Feasibility notes

Maximum height possible according to width

Tilt-only blind

with W from 340 to 399 mm H max = 3000 mm

Blind with raising and tilting functions

with W from 400 to 430 mm H max = 1090 mm*

with W from 431 to 460 mm H max = 1620 mm*

with W from 461 to 490 mm H max = 2150 mm*

with W from 491 to 520 mm H max = 2680 mm**

with W from 521 to 3000 mm H max = 3000 mm**


* Up to H = 3000 mm, blind supplied with tilt-only function and locked bottom rail

** For areas from 5.26 m² to 9 m², blind supplied with tilt-only function and completely raised.

M system – internal brushless motor control

SL20MB SL22MB SL27MB SL29MB SL32MB Pleated

SL20MB SL22MB Pleated

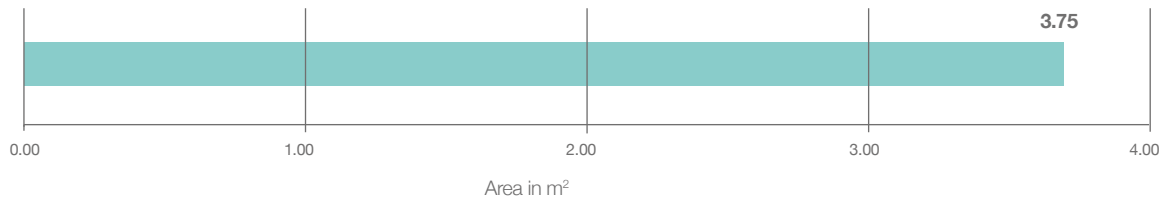

Possible dimensions:


W min =	300 mm	W max =	1500 mm
H min =	300 mm	H max =	2500 mm

Feasibility notes

Maximum height possible according to width

with W from	300	to	350 mm	H max =	1670 mm
with W from	351	to	400 mm	H max =	2020 mm
with W from	401	to	1500 mm	H max =	2500 mm

SL27MB SL29MB SL32MB Pleated

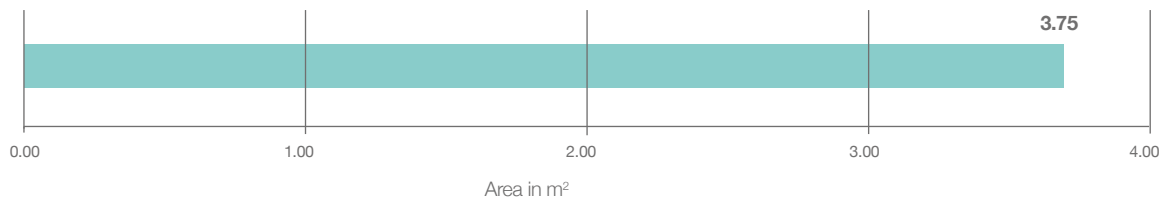

Possible dimensions:

W min =	390 mm	W max =	1500 mm
H min =	300 mm	H max =	2500 mm

Feasibility notes


Maximum height possible according to width

with W from	390	to	420 mm	H max =	1100 mm
with W from	421	to	550 mm	H max =	1800 mm
with W from	551	to	1500 mm	H max =	2500 mm

M system – internal brushless motor control

SL27MB SL29MB SL32MB Pleated Black-out

SL27MB SL29MB SL32MB Pleated Black-out

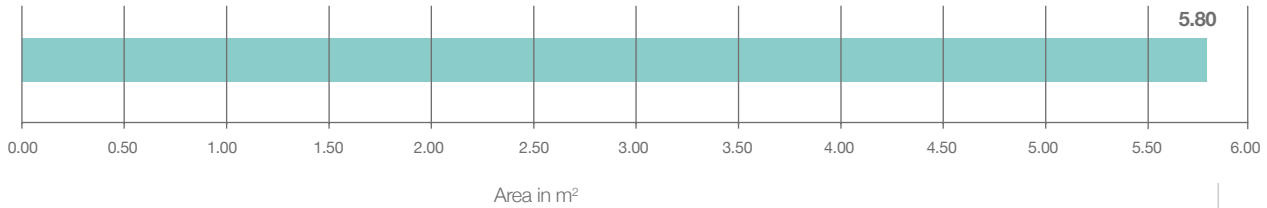

SL27MB SL32MB Pleated Black-out

Possible dimensions:

W min =	390 mm	W max =	2500 mm
H min =	300 mm	H max =	2500 mm

Feasibility notes

Maximum height possible according to width

with W from	390	to	419 mm	H max =	1000 mm
with W from	420	to	449 mm	H max =	1600 mm
with W from	450	to	479 mm	H max =	2100 mm
with W from	480	to	2500 mm	H max =	2500 mm

SL29MB Pleated Black-out


Possible dimensions:

W min =	400 mm	W max =	2500 mm
H min =	300 mm	H max =	2500 mm

Feasibility notes

Maximum height possible according to width

with W from	400	to	430 mm	H max =	1270 mm
with W from	431	to	460 mm	H max =	1800 mm
with W from	461	to	490 mm	H max =	2300 mm
with W from	491	to	2500 mm	H max =	2500 mm



ScreenLine®

Pellini S.p.A.
26845 Codogno (LO) ITALY
via Fusari, 19
T. +39 0377 466411
F. +39 0377 436001 437635
info@pellini.net
www.pellini.net

Edition: 03/2016