



SL16

ScreenLine® | The revolution in integrated blind systems


SL16C

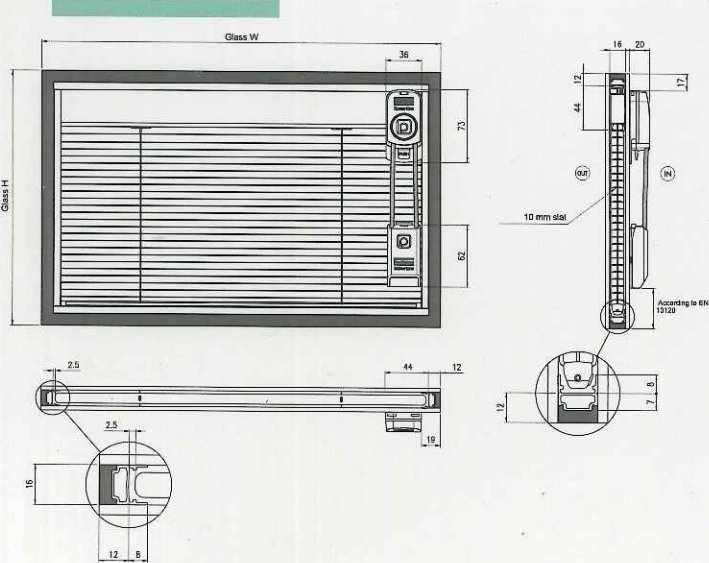

SL16S

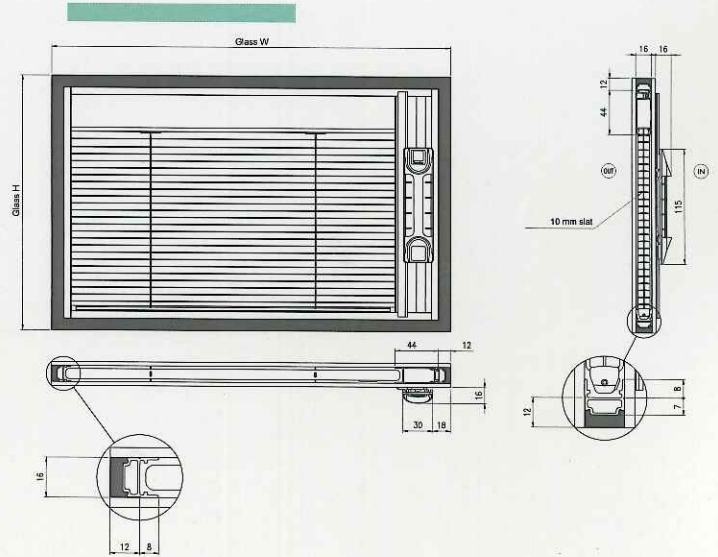

Feasibility charts

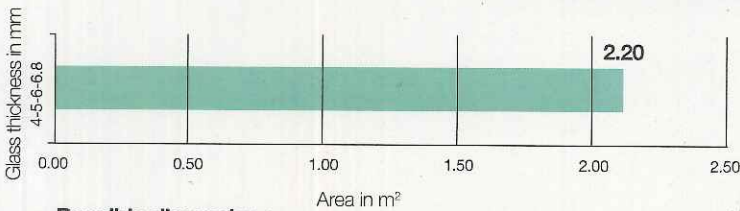


Possible dimensions:

W min = 300 mm	W max = 1200 mm
H min = 300 mm	H max = 2200 mm

Feasibility notes

Maximum height possible according to width	
with W from 300 to 370 mm	H max = 1500 mm
with W from 371 to 1200 mm	H max = 2200 mm*

* For areas from 2.21 m² to 2.4 m², blind supplied with tilt-only function and completely raised

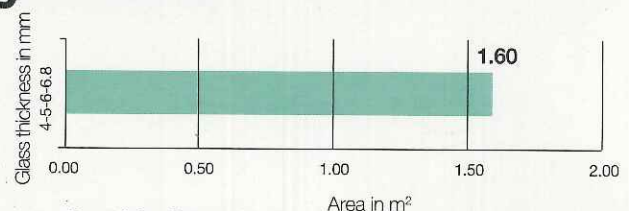

Possible dimensions:

W min = 300 mm	W max = 1200 mm
H min = 500 mm	H max = 2200 mm

Feasibility notes

Maximum height possible according to width	
with W from 300 to 370 mm	H max = 1000 mm
with W from 371 to 1200 mm	H max = 2200 mm*

* For areas from 1.61 m² to 2.4 m², blind supplied with tilt-only function and completely raised

10-mm slat colour range



Warm edge spacer bar colour range

