



Feasibility charts


Edition 01-2022

EN

Effective: 01.01.2022

Feasibility charts


SL20P SL22P Venetian

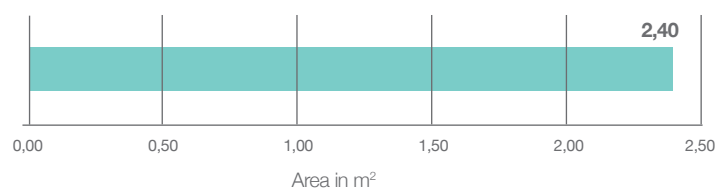

Possible dimensions:

Tilt-only blind			
W min =	190 mm	W max =	2000 mm
H min =	300 mm	H max =	2500 mm

SL24P Venetian

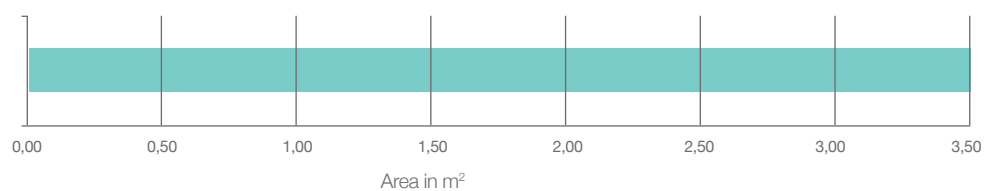


Possible dimensions:

Tilt-only blind			
W min =	190 mm	W max =	3000 mm
H min =	300 mm	H max =	3000 mm

Feasibility charts

SL20B SL22B Venetian

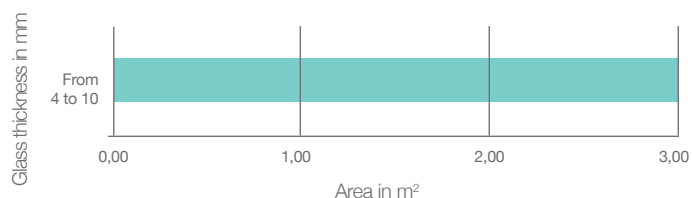

Possible dimensions:

Tilt-only blind


W min =	250 mm	W max =	2000 mm
H min =	300 mm	H max =	2500 mm

Feasibility notes

Maximum height possible according to width

with W from	250	to	300 mm	H max =	1300 mm
with W from	301	to	350 mm	H max =	1800 mm
with W from	351	to	2000 mm	H max =	2500 mm

SL27B Venetian

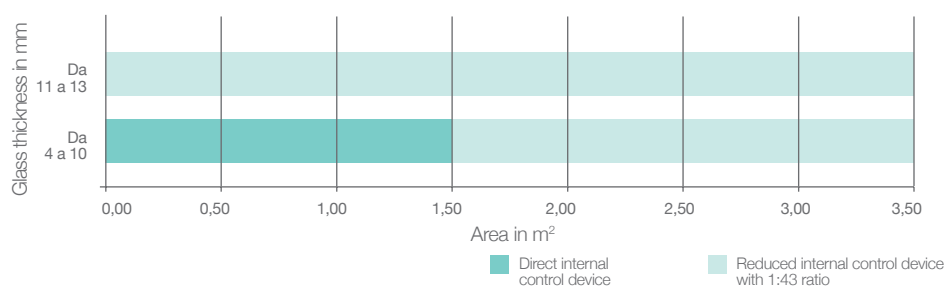

Possible dimensions:

Tilt-only blind

W min =	300 mm	W max =	2500 mm
H min =	300 mm	H max =	2500 mm


Feasibility notes

Maximum height possible according to width

with W from	300	to	349 mm	H max =	2000 mm
with W from	350	to	2500 mm	H max =	2500 mm

Feasibility charts

SL20B SL22B Side Venetian 2.0

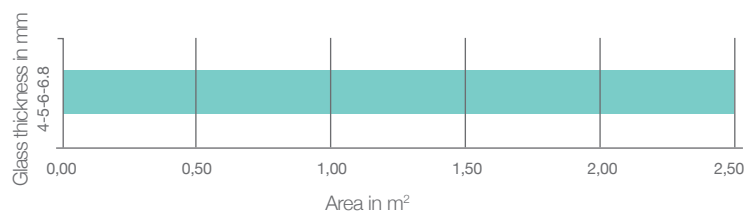

Possible dimensions:

Tilt-only blind

W min =	260 mm	W max =	1500 mm
H min =	300 mm	H max =	2200 mm

Feasibility notes

Maximum height possible according to width

with W from **260** to **400** mm H max = **1800** mm


with W from **401** to **1500** mm H max = **2200** mm*

* The 2.5 m² maximum area cannot be exceeded.

Blind supplied completely

Feasibility charts

SL16S Venetian

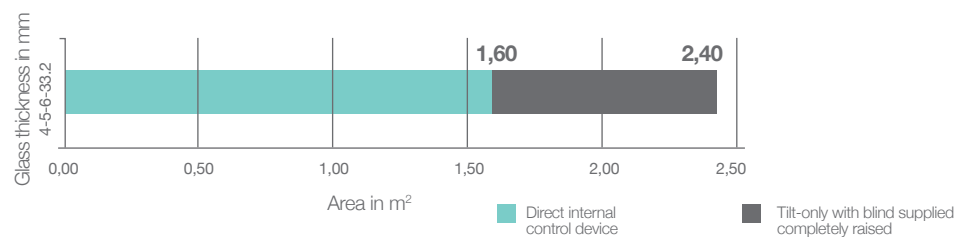

Possible dimensions:

W min =	300 mm	W max =	1200 mm
H min =	500 mm	H max =	2200 mm

Feasibility notes


Maximum height possible according to width

with W from	300	a	370 mm	H max =	1000 mm
with W from	371	a	1200 mm	H max =	2200 mm*

* For areas from 1.61 m² to 2.4 m², blind supplied with tilt-only function and completely raised

Feasibility charts

SL20S SL22S Venetian 2.0

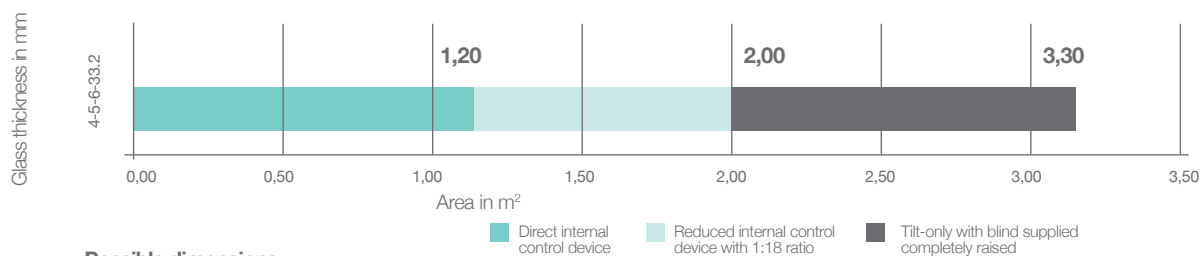

Possible dimensions:

W min =	300 mm	W max =	1500 mm
H min =	450▲ mm	H max =	2200 mm

- ▲ H min = 450 mm with direct internal control device
- ▲ H min = 700 mm with reduced internal control device

Feasibility notes


Maximum height possible according to width

with W from	300	a	350 mm	H max =	1400 mm
with W from	351	a	400 mm	H max =	1800 mm
with W from	401	a	1500 mm	H max =	2200 mm*

*For areas from 2.01 to 3.3 m², blind supplied with tilt-only function and completely raised, using the external slider end stops to limit the tilting movement

Feasibility charts


SL20S SL22S Pleated with top-bottom function

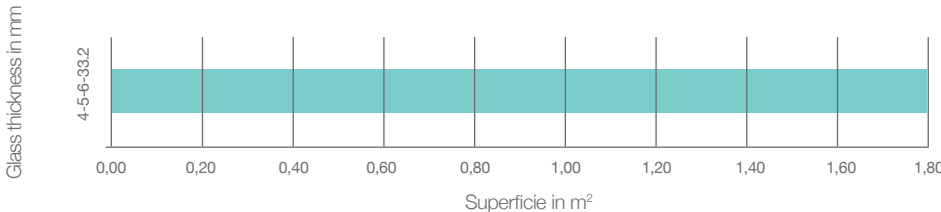

Possible dimensions:

W min =	200 mm	W max =	1200 mm
H min =	200 mm	H max =	2000 mm

SL20S SL22S Pleated with bottom-top function

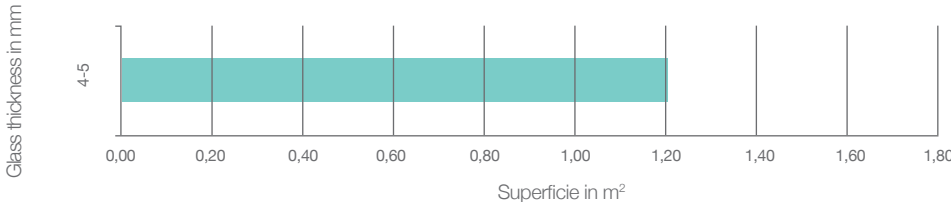

Possible dimensions:


W min =	200 mm	W max =	1200 mm
H min =	200 mm	H max =	2000 mm



N.B.: Refer to document “Operating temperatures Pleated_Verosol_Vanity fabrics” for feasibility notes regarding operating temperatures. Make reference to your ScreenLine sales contact for more details.

Feasibility charts

SL20SP SL22SP Pleated 2.0

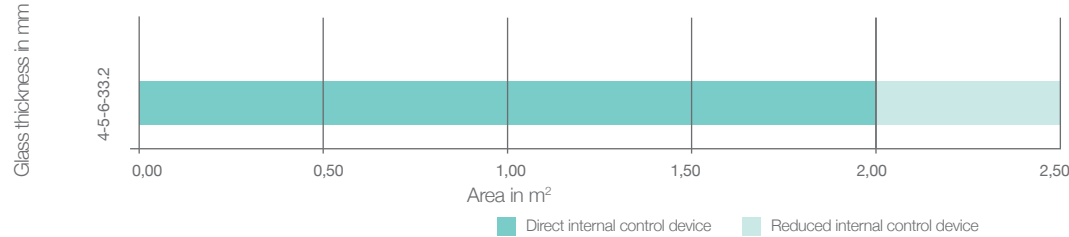

Possible dimensions:

W min =	300 mm	W max =	1500 mm
H min =	450▲ mm	H max =	2200 mm

- ▲ H min = 450 mm with direct internal control device
- ▲ H min = 900 mm with reduced internal control device

Feasibility notes

Maximum height possible according to width


with W from	300	to	400 mm	H max =	1800 mm
with W from	401	to	1500 mm	H max =	2200 mm



N.B.: Refer to document “Operating temperatures Pleated_Verosol_Vanity fabrics” for feasibility notes regarding operating temperatures. Make reference to your ScreenLine sales contact for more details.

Feasibility charts

SL16C Venetian

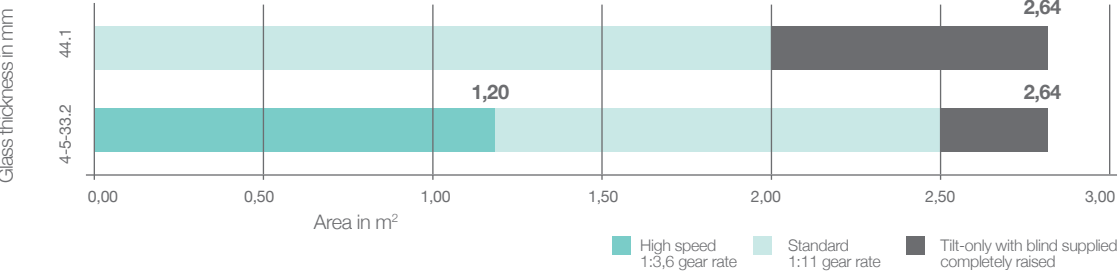

Possible dimensions:

W min =	300 mm	W max =	1200 mm
H min =	300 mm	H max =	2200 mm

Feasibility notes

Maximum height possible according to width


with W from	300	to	370 mm	H max =	1500 mm*
with W from	371	to	1200 mm	H max =	2200 mm**

* Up to H = 2200 mm, blind supplied with tilt-only function and locked bottom rail (SL16A)
 ** For areas from 2.51 m² (2.01 m² with 8.38 internal glass thickness) to 2.64 m², blind supplied with tilt-only function and completely raised

Feasibility charts

N.B.: Feasibility charts with triple glazing may vary from the ones indicated here below: please refer to your ScreenLine sales contact for more details.

SL20C SL22C Venetian

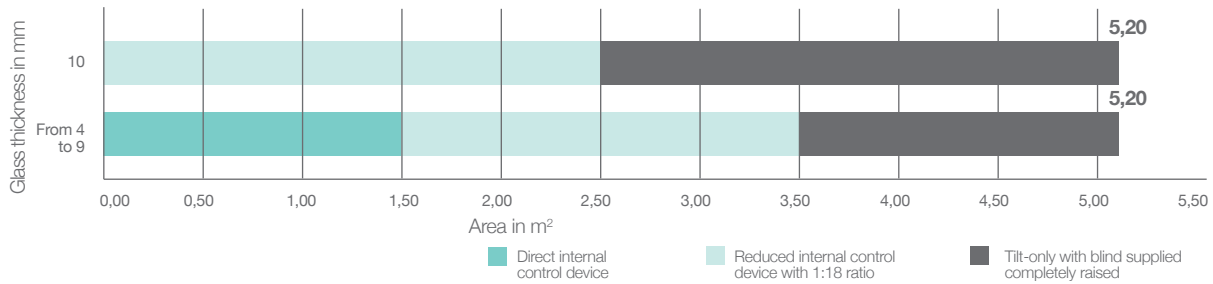

Possible dimensions:

W min =	300 mm	W max =	2000 mm
H min =	300 mm	H max =	2600 mm

Feasibility notes

Maximum height possible according to width


Blind with raising and tilting functions

with W from	300	to	350 mm	H max =	1100 mm*
with W from	351	to	400 mm	H max =	1800 mm*
with W from	401	to	450 mm	H max =	2150 mm*
with W from	451	to	2000 mm	H max =	2600 mm**

* Up to H = 2600 mm, blind supplied with tilt-only function and locked bottom rail

** For areas from 3.51 m² to 5.2 m², blind supplied with tilt-only function and completely raised (with 10-mm glass from 2.51 to 5.2 m²)

SL27C SL29C SL32C Venetian

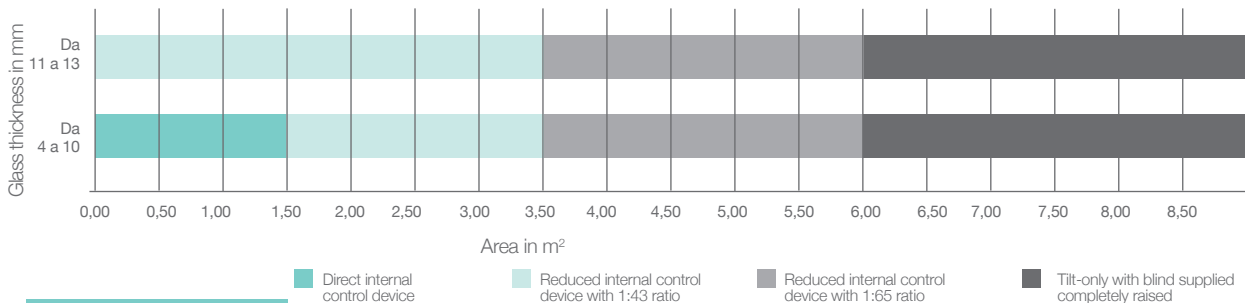

SL27C Venetian

Possible dimensions:

W min =	300 mm	W max =	3000 mm
H min =	300 mm	H max =	3000 mm

Feasibility notes

Maximum height possible according to width

Blind with raising and tilting functions

with W from	300	to	350 mm	H max =	750 mm*
with W from	351	to	480 mm	H max =	1800 mm*
with W from	481	to	580 mm	H max =	2400 mm*
with W from	581	to	3000 mm	H max =	3000 mm**

SL29C Venetian

Possible dimensions:

W min =	340 mm	W max =	3000 mm
H min =	300 mm	H max =	3000 mm

Feasibility notes

Maximum height possible according to width

Blind with raising and tilting functions

with W from	340	to	400 mm	H max =	770 mm*
with W from	401	to	480 mm	H max =	1800 mm*
with W from	481	to	580 mm	H max =	2890 mm*
with W from	581	to	3000 mm	H max =	3000 mm**

SL32C Venetian

Possible dimensions:

W min =	300 mm	W max =	3000 mm
H min =	300 mm	H max =	3000 mm

Feasibility notes

Maximum height possible according to width

Blind with raising and tilting functions

with W from	300	to	350 mm	H max =	550 mm*
with W from	351	to	480 mm	H max =	1600 mm*
with W from	481	to	580 mm	H max =	2200 mm*
with W from	581	to	3000 mm	H max =	3000 mm**


* Up to H = 3000 mm, blind supplied with tilt-only function and locked bottom rail (SL27/29/32A)

** For areas from 6.01 m² to 9 m², blind supplied with tilt-only function and completely raised.

Feasibility charts

N.B.: Feasibility charts with triple glazing may vary from the ones indicated here below: please refer to your ScreenLine sales contact for more details.

SL20C SL22C Pleated

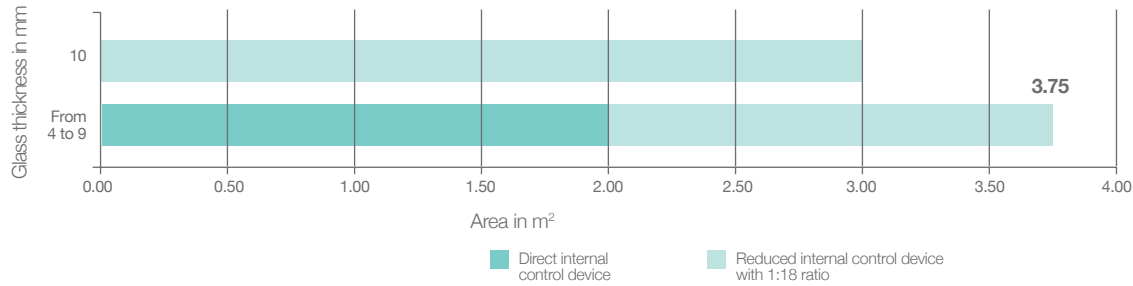

Possible dimensions:

W min =	300 mm	W max =	1500 mm
H min =	300 mm	H max =	2500 mm

Feasibility notes

Maximum height possible according to width

with W from	300	to	350 mm	H max =	1100 mm
with W from	351	to	400 mm	H max =	1800 mm
with W from	401	to	450 mm	H max =	2150 mm
with W from	451	to	1500 mm	H max =	2500 mm




N.B.: Refer to document “Operating temperatures Pleated_Verosol_Vanity fabrics” for feasibility notes regarding operating temperatures. Make reference to your ScreenLine sales contact for more details.

Feasibility charts

N.B.: Feasibility charts with triple glazing may vary from the ones indicated here below: please refer to your ScreenLine sales contact for more details.

SL27C SL29C SL32C Pleated Black-out

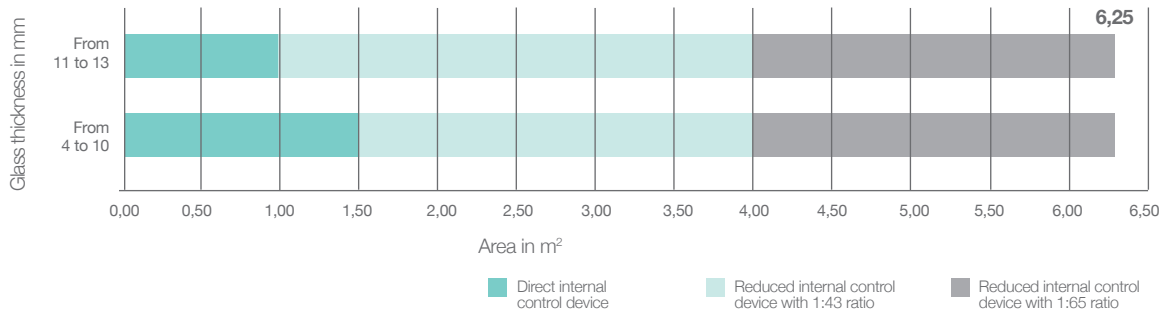

SL27C Pleated Black-out

Possible dimensions:

W min = 300 mm	W max = 2500 mm
H min = 300 mm	H max = 2500 mm

Feasibility notes

Maximum height possible according to width

with W from 300 to 350 mm	H max = 750 mm
with W from 351 to 480 mm	H max = 1800 mm
with W from 481 to 550 mm	H max = 2400 mm
with W from 551 to 2500 mm	H max = 2500 mm

SL29C Pleated Black-out

Possible dimensions:

W min = 340 mm	W max = 2500 mm
H min = 300 mm	H max = 2500 mm

Feasibility notes

Maximum height possible according to width

with W from 340 to 400 mm	H max = 770 mm
with W from 401 to 480 mm	H max = 1800 mm
with W from 481 to 580 mm	H max = 2300 mm
with W from 581 to 2500 mm	H max = 2500 mm

SL32C Pleated Black-out

Possible dimensions:

W min = 300 mm	W max = 2500 mm
H min = 300 mm	H max = 2500 mm

Feasibility notes




Maximum height possible according to width

with W from 300 to 350 mm	H max = 550 mm
with W from 351 to 480 mm	H max = 1600 mm
with W from 481 to 550 mm	H max = 2200 mm
with W from 551 to 2500 mm	H max = 2500 mm

Feasibility charts

N.B.: Feasibility charts with triple glazing may vary from the ones indicated here below: please refer to your ScreenLine sales contact for more details.


SL27C Roller

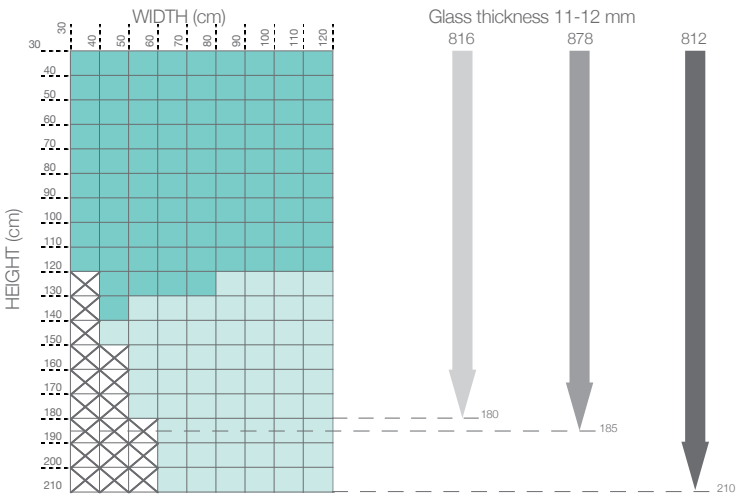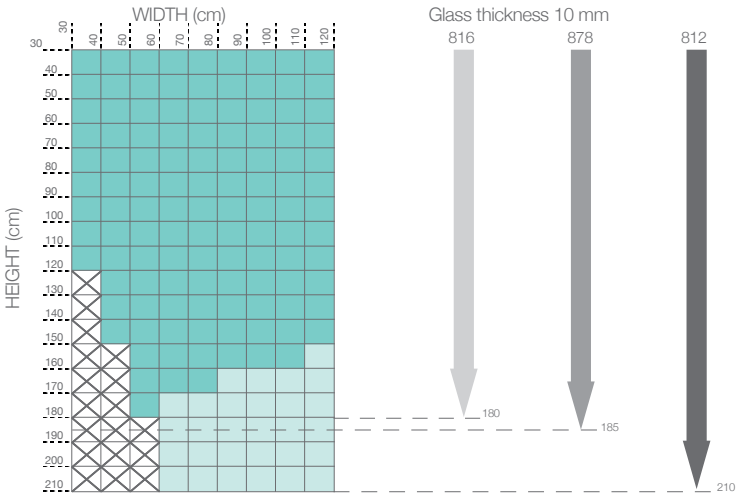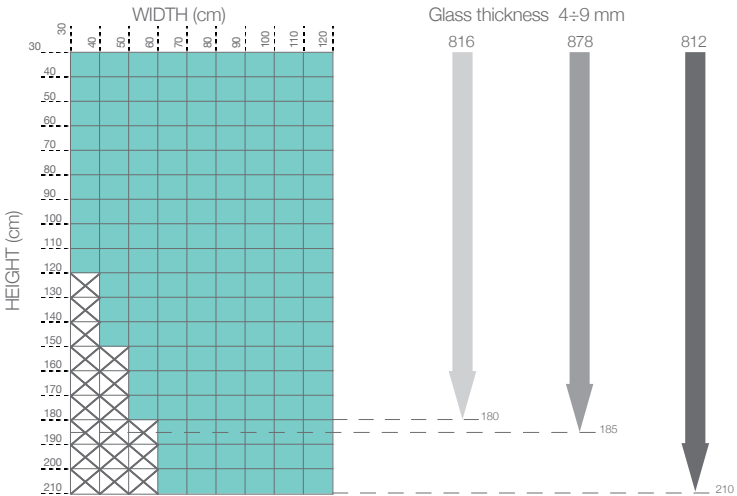

- Verosol® fabrics
- 816 Transparent
 - 812 Semi-transparent
 - 878 Opaque
- Direct internal control device
 - Reduced internal control device
 - Not feasible

Feasibility charts

SL20W SL22W Smart Venetian

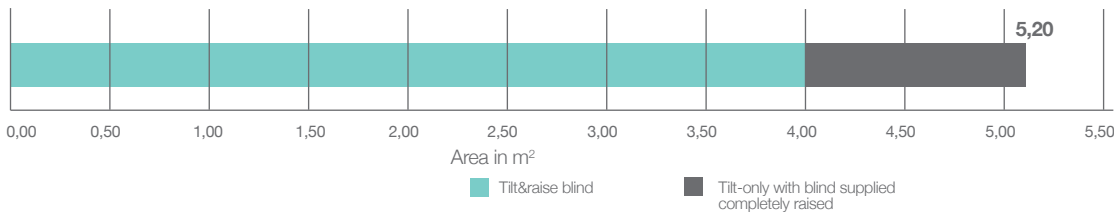

Possible dimensions:

W min = 300 mm	W max = 2000 mm
H min = 300 mm	H max = 2600 mm

Feasibility notes

Maximum height possible according to width


Blind with raising and tilting functions

with W from 300 to 350 mm	H max = 1670 mm*
with W from 351 to 400 mm	H max = 2020 mm*
with W from 401 to 2000 mm	H max = 2600 mm**

* Up to H = 2600 mm, blind supplied with tilt-only function and locked bottom rail

** For areas from 4.01 m² to 5.2 m², blind supplied with tilt-only function and completely raised

SL27W SL29W SL32W Smart Venetian

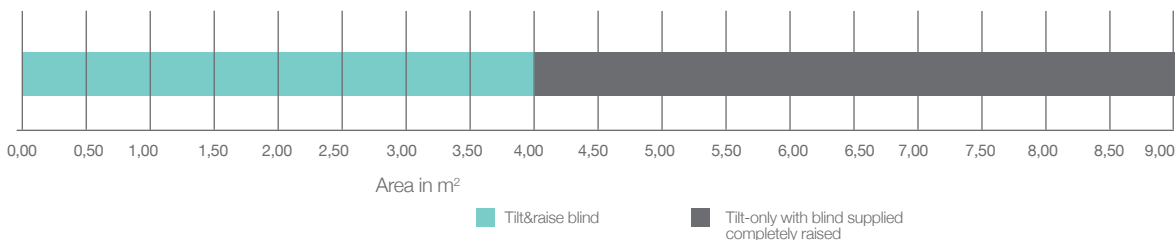

SL27W SL32W Smart Venetian

Possible dimensions:

W min = 320 mm	W max = 3000 mm
H min = 300 mm	H max = 3000 mm

Feasibility notes

Maximum height possible according to width

Tilt-only blind

with W from 320 to 389 mm	H max = 3000 mm
---------------------------	-----------------

Blind with raising and tilting functions

with W from 390 to 419 mm	H max = 1000 mm*
with W from 420 to 449 mm	H max = 1600 mm*
with W from 450 to 599 mm	H max = 2100 mm*
with W from 600 to 3000 mm	H max = 3000 mm**

* Up to H = 3000 mm, blind supplied with tilt-only function and locked bottom rail

** For areas from 4.01 m² to 9 m², blind supplied with tilt-only function and completely raised.

SL29W Smart Venetian

Possible dimensions:

W min = 340 mm	W max = 3000 mm
H min = 300 mm	H max = 3000 mm

Feasibility notes

Maximum height possible according to width

Tilt-only blind

with W from 340 to 399 mm	H max = 3000 mm
---------------------------	-----------------

Blind with raising and tilting functions


with W from 400 to 430 mm	H max = 1090 mm*
with W from 431 to 460 mm	H max = 1620 mm*
with W from 461 to 490 mm	H max = 2150 mm*
with W from 491 to 520 mm	H max = 2680 mm*
with W from 521 to 3000 mm	H max = 3000 mm**

* Up to H = 3000 mm, blind supplied with tilt-only function and locked bottom rail

** For areas from 4.01 m² to 9 m², blind supplied with tilt-only function and completely raised.

Feasibility charts

SL20W SL22W Smart Pleated

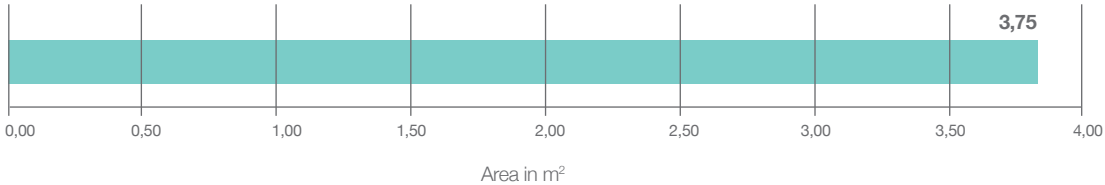

Possible dimensions	
W min =	300 mm
W max =	1500 mm
H min =	300 mm
H max =	2500 mm


Feasibility notes	
Maximum height possible according to width	
with W from 300 to 350 mm	H max = 1670 mm
with W from 351 to 400 mm	H max = 2020 mm
with W from 401 to 1500 mm	H max = 2500 mm



N.B.: Refer to document “Operating temperatures Pleated_Verosol_Vanity fabrics” for feasibility notes regarding operating temperatures. Make reference to your ScreenLine sales contact for more details.

Feasibility charts

SL27W SL29W SL32W Smart Pleated Black-out

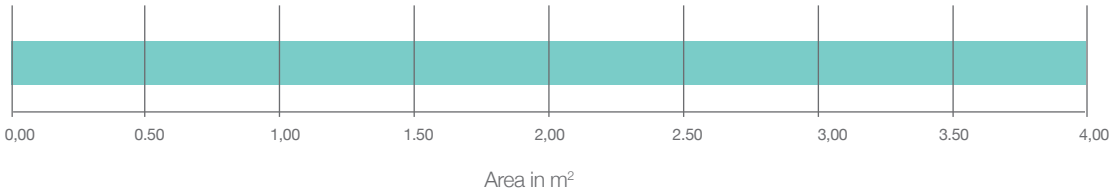

SL27-32W Smart Pleated Black-out


Possible dimensions:		Feasibility notes	
W min = 390 mm	W max = 2500 mm	Maximum height possible according to width	
H min = 300 mm	H max = 2500 mm	with W from 390 to 419 mm	H max = 1000 mm
		with W from 420 to 449 mm	H max = 1600 mm
		with W from 450 to 479 mm	H max = 2100 mm
		with W from 480 to 2500 mm	H max = 2500 mm

SL29W Smart Pleated Black-out

Possible dimensions:		Feasibility notes	
W min = 400 mm	W max = 2500 mm	Maximum height possible according to width	
H min = 300 mm	H max = 2500 mm	with W from 400 to 430 mm	H max = 1270 mm
		with W from 431 to 460 mm	H max = 1800 mm
		with W from 461 to 490 mm	H max = 2300 mm
		with W from 491 to 2500 mm	H max = 2500 mm

Feasibility charts

SL20MB SL22MB Venetian

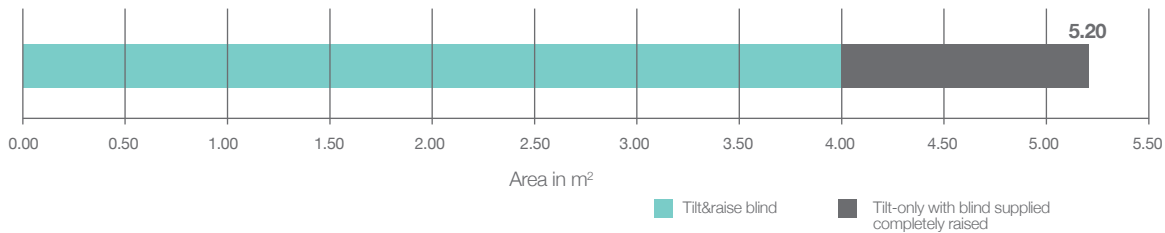

Possible dimensions:

W min =	300 mm	W max =	2000 mm
H min =	300 mm	H max =	2600 mm

Feasibility notes


Maximum height possible according to width

with W from	300	to	350 mm	H max =	1670 mm*
with W from	351	to	400 mm	H max =	2020 mm*
with W from	401	to	2000 mm	H max =	2600 mm**

* Up to H = 2600 mm, blind supplied with tilt-only function and locked bottom rail

** For areas from 4.01 m² to 5.2 m², blind supplied with tilt-only function and completely raised.

SL27MB SL29MB SL32MB Venetian

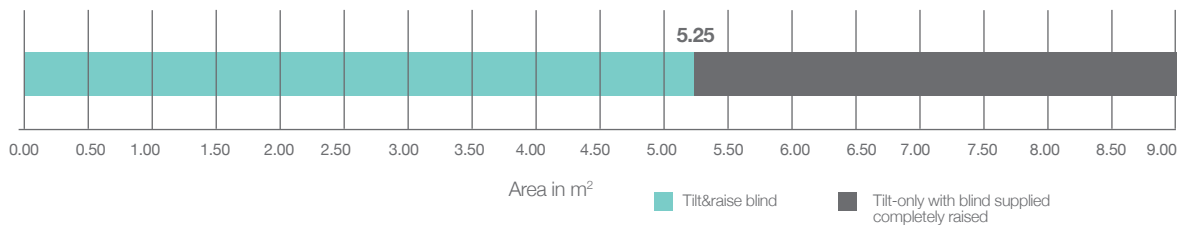

SL27MB SL32MB Venetian

Possible dimensions:

W min =	320 mm	W max =	3000 mm
H min =	300 mm	H max =	3000 mm

Feasibility notes

Maximum height possible according to width

Tilt-only blind					
con W da	320	to	389 mm	H max =	3000 mm
Blind with raising and tilting functions					
with W from	390	to	419 mm	H max =	1000 mm*
with W from	420	to	449 mm	H max =	1600 mm*
with W from	450	to	599 mm	H max =	2100 mm*
with W from	600	to	3000 mm	H max =	3000 mm**

SL29MB Venetian

Possible dimensions:

W min =	340 mm	W max =	3000 mm
H min =	300 mm	H max =	3000 mm

Feasibility notes

Maximum height possible according to width


Tilt-only blind					
with W from	340	to	399 mm	H max =	3000 mm
Blind with raising and tilting functions					
with W from	400	to	430 mm	H max =	1090 mm*
with W from	431	to	460 mm	H max =	1620 mm*
with W from	461	to	490 mm	H max =	2150 mm*
with W from	491	to	520 mm	H max =	2680 mm*
with W from	521	to	3000 mm	H max =	3000 mm**

* Up to H = 3000 mm, blind supplied with tilt-only function and locked bottom rail

** For areas from 5.26 m² to 9 m², blind supplied with tilt-only function and completely raised.

Feasibility charts

SL20MB SL22MB Pleated

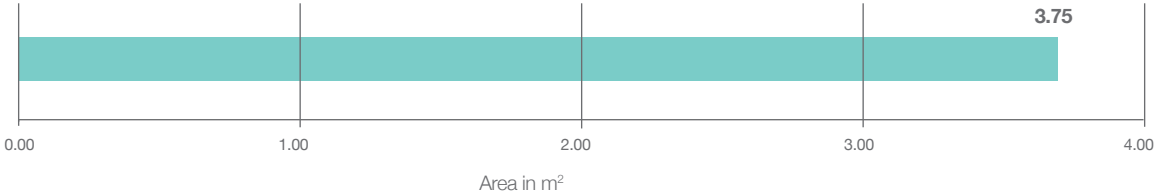

Possible dimensions:

W min =	300 mm	W max =	1500 mm
H min =	300 mm	H max =	2500 mm

Feasibility notes


Maximum height possible according to width			
with W from	300	to	350 mm
		H max =	1670 mm
with W from	351	to	400 mm
		H max =	2020 mm
with W from	401	to	1500 mm
		H max =	2500 mm



N.B.: Refer to document “Operating temperatures Pleated_Verosol_Vanity fabrics” for feasibility notes regarding operating temperatures. Make reference to your ScreenLine sales contact for more details.

Feasibility charts

SL27MB SL29MB SL32MB Pleated Black-out

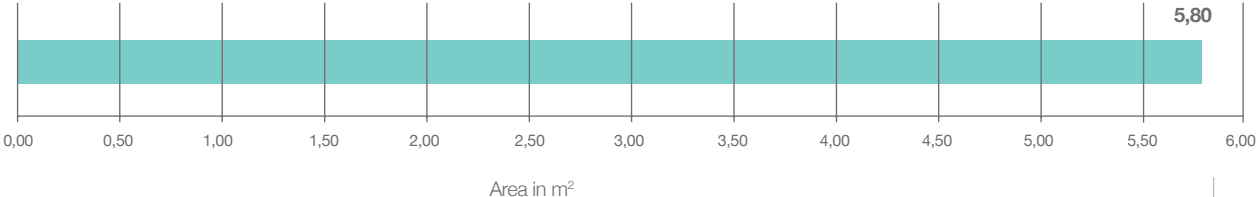

SL27MB SL32MB Pleated Black-out

Possible dimensions:

W min = 390 mm	W max = 2500 mm
H min = 300 mm	H max = 2500 mm

Feasibility notes

Maximum height possible according to width

with W from 390 to 419 mm	H max = 1000 mm
with W from 420 to 449 mm	H max = 1600 mm
with W from 450 to 479 mm	H max = 2100 mm
with W from 480 to 2500 mm	H max = 2500 mm

SL29MB Pleated Black-out


Possible dimensions:

W min = 400 mm	W max = 2500 mm
H min = 300 mm	H max = 2500 mm

Feasibility notes

Maximum height possible according to width

with W from 400 to 430 mm	H max = 1270 mm
with W from 431 to 460 mm	H max = 1800 mm
with W from 461 to 490 mm	H max = 2300 mm
with W from 491 to 2500 mm	H max = 2500 mm



ScreenLine[®]
by Pellini

Pellini S.p.A.
26845 Codogno (LO) ITALY
via Fusari, 19
T. +39 0377 466411
F. +39 0377 436001 437635
info@pellini.net
www.pellini.net

Edition 01-2022